


UDIAG[®]

WWW.UDIAGTECH.COM

1. Diagnostic operation

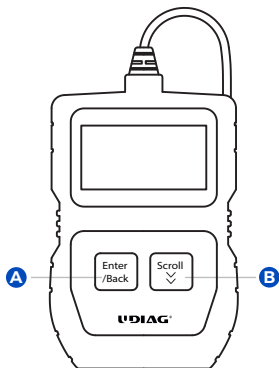

This section illustrates external features, ports and connectors of the code reader.

A Enter/Back Key

Return to the previous interface or exits. Confirm the current operation.

B Scroll Key

To select an option or scroll through a screen of data or text.

2. Service and support

Website: www.udiatech.com

Email: service@udiatech.com

Please refer to the User Manual on our website for more operational details.

3. Before start diagnosis, please make sure

1



The ignition switch is turned to ON position

2



Engine is off

3



10 to 14 volt vehicle power



Never try to provide power for the code reader from USB connection when the code reader is communicating with a vehicle.



Don't connect or disconnect the equipments while the ignition is on or the engine is running.

4. Powering up the scanner

Please follow below steps to turn on the scanner:

a



Turn the ignition off.

b



Find the data link connector (DLC) on vehicle, which is located under instrument cluster on the driver side.

c



Switch the ignition key to the ON position.

d



The scanner will power up automatically.

5. Warranty and service

Limited One Year Warranty

The warranty is 1 year for hardware, which does not cover damage caused by human factors, accidents, misuse of the product. Under the warranty, customers can ask for replacement due to non-human damage.